

IMPREX® PRIME



Features




- Real All-in-One POS Terminal
- Stylish Look and Innovative Design
- High-Speed 3" Thermal Receipt Printer Integrated
- Intel®'s Latest High-Performance Processors
- 15" or 17" Bezel-Free True-Flat Display with PCAP Touch
- Multiple I/O Ports and Peripheral Options
- Tool-less and Modular Design for Easy Maintenance

Specifications

	Hs		J19	
System	Processors	Intel® Core™ i5-6500T (6M Cache, 2.50/3.10 GHz(Turbo), 4 Cores) Intel® Core™ i3-6100T (3M Cache, 3.20 GHz, 2 Cores) Intel® Pentium® G4400T (3M Cache, 2.90 GHz, 2 Cores) Intel® Core™ i7-7700T (8M Cache, 2.90/3.80 GHz(Turbo), 4 Cores) Intel® Core™ i5-7500T (6M Cache, 2.70/3.30 GHz(Turbo), 4 Cores) Intel® Core™ i3-7100T (3M Cache, 3.40 GHz, 2 Cores)	Intel® Celeron® J1900 (2M Cache, 2.0/2.42 GHz(Burst), 4 Cores), Fanless	
	Chipset	Intel® H170	Intel® Bay Trail	
	Memory	4GB Standard (Max. 64GB), DDR4 2133MT/s, Socket 2 x SODIMM	4GB Standard (Max. 8GB), DDR3L 1600 MT/s, Socket 2 x SODIMM	
	Storage	SATA 3 (6Gb/s) 2.5 inch SSD 64GB (Max. 2 Optional), Support AHCI	SATA 2 (3Gb/s) 2.5 inch SSD 64GB, Support AHCI	
	RAID	RAID 0,1	-	
	Operating Systems	Windows 10 IoT Enterprise	Windows 7, Windows 8.1, Windows 10 IoT Enterprise, POS Ready 7	
	Audio	HD Audio Codec		
Display	Type	15" TFT LCD, LED Backlight 17" TFT LCD, LED Backlight		
	Resolution	15" 1024 x 768 17" 1280 x 1024		
	Brightness	15" 300 cd/m² (typ.) 17" Max. 300 cd/m² (typ.)		
	Touchscreen	Projective Capacitive Touch		
Interface	Display	1 x VGA (With Power Output)		
	USB	8 (Rear 6 = USB 3.0 x 6 Side 2 = USB 2.0 x 2) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	8 (Rear 6 = USB 3.0 x 1, USB 2.0 x 5 Side 2 = USB 2.0 x 2) 3 (Reserved for MSR, SCR, i-Button/Touch Controller/Camera), RJ-45	
	PS/2	1 (Reserved for Keyboard or Mouse)		
	Serial	6 (COM 1~2 with 5V/12V Power Output on 9 Pins, Jumper) (COM3 with 5V/12V Power Output on 9 Pins, BIOS) (COM4 Only TX/RX, 12V Power Output, Reserved for CDP) (COM5 Reserved for Printer) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR)		
	LAN	2 x Gigabit Ethernet, RJ-45		
	Audio	1 x Line-out, 1 x Mic-in		
	Power DC-IN	1 x (3 Pin DIN Jack)		
	Extension Slot	Mini PCIe		
	Power	Power Supply	Adaptor 24V, 6.35A (3 Pin DIN Plug)	
Physical & Environmental	Operating Temperature	0 °C ~ 50 °C at 10% to 80% Humidity		
	Storage Temperature	-20 °C ~ 80 °C at 10% to 80% Humidity		
	Dimensions (W x H x D)	364 x 382 x 345 (mm), 14.3 x 15 x 13.5 (in)		
	Packing Dimensions (W x H x D)	460 x 480 x 460 (mm), 18.1 x 18.8 x 18.1 (in)		
	Net Weight	9,400g, 20.7 lbs		
	Packing Weight	12,500g, 27.5lbs		
	Certification	CE, FCC, KC, CCC		
Options & Peripherals	Color	High Gloss Black, High Gloss White, Custom Colors Available		
	Display	17" TFT LED Backlight, 1280 x 1024		
	Touchscreen	5-Wired Resistive		
	2nd Displays	9.7", 12.1", 15" LCD Display, 1024 x 768, Optional Touchscreen 13.3" (1920 x 1080)		
	Customer Display	VFD, 20 Columns x 2 Lines		
	I/O Expansion	1 x Parallel Port (D-SUB 25 Pins) / 1 x DVR Card (PCI 4 Channel) / 1 x Cash Drawer Port (RJ-11 6 Pins)		
	Storage	2.5 inch SSD 128GB, HDD 500GB, 1TB / 2nd 2.5 inch SSD 64GB, SSD 128GB, HDD 500GB, HDD 1TB		
	Integrated Printer	3" Jam-Free Thermal, Max. 250mm/s, Auto Cutter (Interface : Serial, USB)		
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track		
	Smart Card Reader	EMV Level 1, 2		
	Dallas	Dallas i-button Reader		
	Fingerprint	Yes		
	System Fan	1 (40mm x 40mm, Normal Type)		
	Battery	-	Smart Battery : 3S1P 2050mAh	
	Camera	5M USB Interface (Internal) (Factory Option)		
	WiFi	Mini PCIe for Wireless LAN		
Speaker	2 x 1W (Stereo) (Factory Option)			


Dimensions

Unit : mm

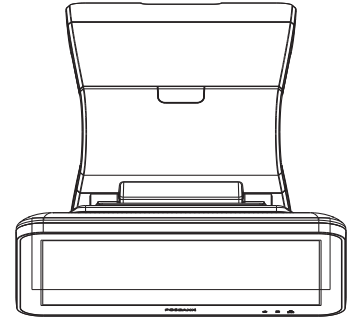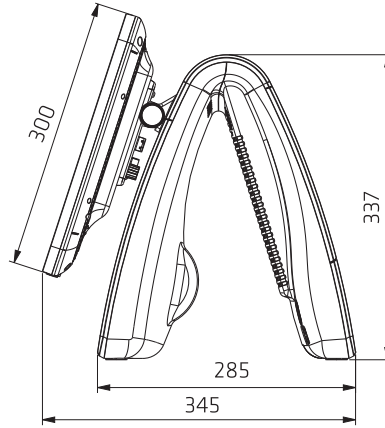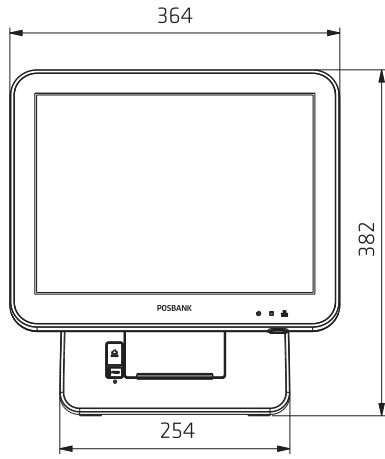


I/O Interfaces

Hs

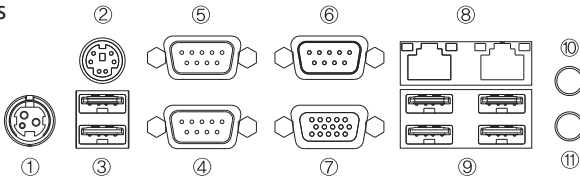

- ① Power Connector / 24V
- ② PS/2 Connector
- ③ USB 3.0 x 2
- ④ COM 1
- ⑤ COM 2
- ⑥ COM 3
- ⑦ VGA
- ⑧ LAN x 2
- ⑨ USB 3.0 x 4
- ⑩ AUDIO OUT
- ⑪ MIC IN

J19

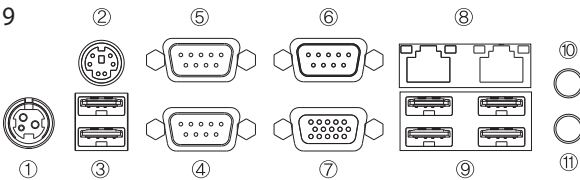

- ① Power Connector / 24V
- ② PS/2 Connector
- ③ USB 2.0 x 2
- ④ COM 1
- ⑤ COM 2
- ⑥ COM 3
- ⑦ VGA
- ⑧ LAN x 2
- ⑨ USB 3.0 x 1, USB 2.0 x 3
- ⑩ AUDIO OUT
- ⑪ MIC IN

Ordering Information

Part No.	Description
IMPRES PRIME (BP)	Intel Celeron J1900 Quad-Core, DDR3 4GB, SSD 64GB, 15" P-CAP Touch, Printer, No O/S, Black
IMPRES PRIME Hs (BP)	Intel Core i3-6100T, DDR4 4GB, SSD 64GB, 15" P-CAP Touch, Printer, No O/S, Black
IMPRES PRIME Hs (BP)	Intel Core i5-6500T, DDR4 4GB, SSD 64GB, 15" P-CAP Touch, Printer, No O/S, Black
IMPRES PRIME Hs (BP)	Intel Pentium G4400T, DDR4 4GB, SSD 64GB, 15" P-CAP Touch, Printer, No O/S, Black
IPO-MS 237 C_P_B	MSR, Black
IPO-MS 237 D3_IB_P_B	MSR + i Button, Black
IPO-MS 237 E2_SCR B	MSR + SCR, Black
IPO-MS 237 E3_SCR_IB	MSR + SCR + i Button, Black
IMPRES P_9.7 (B)	9.7" 2nd Display, Black, No Touch
IMPRES P_12.1 (B)	12.1" 2nd Display, Black, No Touch
IMPRES P_13.3 (B)	13.3" 2nd Display, Black, No Touch
IMPRES P_15 (B)	15" 2nd Display, Black, No Touch
IMPRES P_CDP (B)	Customer Display, Black

Peripherals



2nd Display

- 9.7", 12.1", 13.3", 15" LCD



Customer Display

- VFD (2 Line x 20 Characters)



Card Reader

- MSR, SCR

شركة نور الخليج لتقنية المعلومات

الخبر الشمالية. المملكة العربية السعودية. عمارات بغلف - شارع الأمير بدر تقاطع أ خلف المخازن الذاتية
0591262231 : فرع الرياض | 0595674414 - 0591058811 - 0580401772 - 0583495409 | sales@posbank.me | www.posbank.me